

**MODEL: "C" – 83 Ton**




**MOT** Tubing Spiders are pneumatic or hydraulic spiders with slips that handle tubing sizes from 1.315" to 5-1/2".

These slips are operated by a remote foot valve connected to the slip by a set of hoses, eliminating the need for lifting and setting the slips manually while tripping the string.

They are available in 83 Ton and 125 Ton versions. MOT's style tubing spiders operate using full circle wrap around inserts to prevent damage to the tubing. Construction is of high quality alloy steel that provides durability.

**MODEL: "CHD" – 125 Ton**

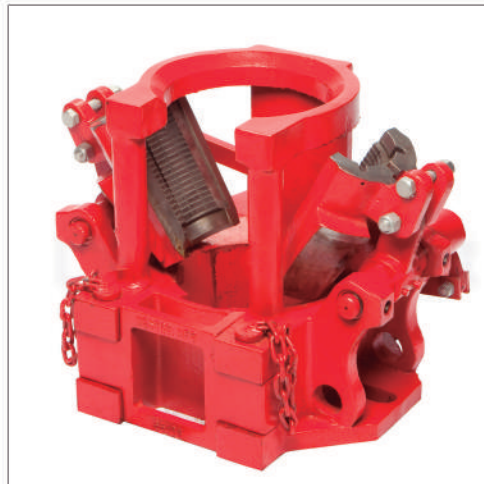

TUBING SPIDERS		
MODEL	TYPE C (83 TON)	TYPE CHD (125TON)
CAPACITY Lbs / (Kg)	165,000 (74,850)	250,000 (113,400)
WEIGHT w/ Slips Lbs / (Kg)	430 (195)	480 (218)
HEIGHT	16 1/2"	16 1/2"
BASE DIMENSION	16 1/2" X 18 1/2"	16 1/2" X 18 1/2"
GATE OPENING	5 3/4"	5 3/4"
BOWL OPENING	6 1/2" DIAMETER	6 1/2" DIAMETER
TUBULAR RANGE	1.315 - 5 1/2"	1.315 - 5 1/2"
SPIDER ASSEMBLY (LESS SLIPS)		
PNEUMATIC	65000-100	650000HD-100
HYDRAULIC	650000H-100	650000HDH-100
HYDRAULIC / INVERTED / SNUBBING	N/A	650000HDHS-100
SLIP BODY, 3-1/2", SIDE LOAD	65622-100	
SLIP BODY, 3-1/2", TOP LOAD	65622TL-100	
SLIP BODY, 4-1/2", SIDE LOAD	65623-100	
INTEGRAL SLIPS BODY		
4-3/4" (120.7 mm) TUBING	65624-4.75	55 Lb (25 Kg)
5" (127.0 mm) TUBING	65624-1	50 LB (22.7 Kg)
5-1/2" (139.7 mm) TUBING	65624-2	45 Lb (20.4 Kg)